




## POLARIZATION-INDEPENDENT DUAL-WINDOW COUPLERS

### Description

Fused Biconic Taper (FBT) Technique is used to make our polarization-independent dual-window couplers. They are based on the standard dual-window couplers. However, they have very low polarization dependent loss (PDL) of less than 0.06dB for coupling ratio 50/50. They are suited for applications where PDL of the system is critical.

1x2 couplers are used to split light, with minimal loss, from one into two fibers or to merge light from two fibers into one in windows of 1310nm and 1550nm.

1xN tree couplers and NxN star couplers are made with fuse cascade-connecting (N-1) pieces of 1x2 and 2x2 couplers respectively.

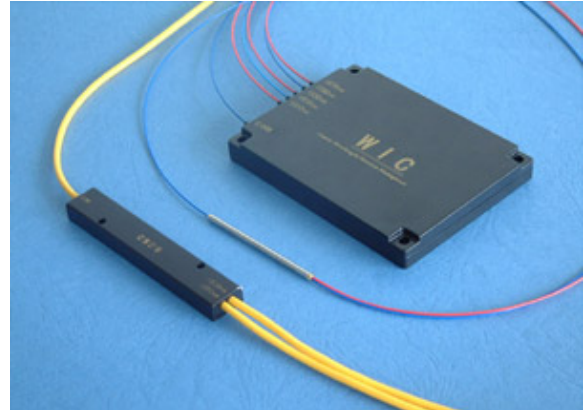

### Features

- Dual wavelength with wide bandwidth
- Minimal polarization dependence
- Environmentally stable
- Low loss

### Applications

- Optical Amplifiers
- CATV
- WDM systems
- LAN

### Specifications

Characteristics		Unit	Value/Performance			
<b>1X2, 2X2</b>						
Center Wavelength		nm	1310 and 1550			
Bandwidth		nm	±40			
Excess Loss		dB	≤0.08 (0.06 typ.)			
Coupling Ratio		-	50/50	40/60	30/70	20/80
Typ. Insertion Loss		dB	3.06	4.1/2.3	5.3/1.6	7.1/1.0
Max. Insertion Loss		dB	3.6	4.7/2.7	6.0/1.9	7.9/1.3
Polarization Dependent Loss		dB	≤0.06	≤0.06	≤0.09/0.06	≤0.12/0.09
Thermal Stability		dB/°C	≤0.002 over -40 ~ +80°C			
Directivity	1x2	dB	≥50, ≥60 on request			
	2x2	dB	≥65			
Lead Length		m	1, others on request			
Lead Type		-	250um bare fiber	900um loose tube	2 or 3mm loose tube	
Package Type		-	A1	A3 or B	B	
Operating Temperature		°C	-40 ~ +80	-20 ~ +70	-20 ~ +70	

## Specifications

Characteristics		Unit	Value/Performance			
<b>1X2, 2X2, Tap-couplers</b>						
Center Wavelength		nm	1310 and 1550			
Bandwidth		nm	±40nm			
Excess Loss		dB	≤0.08			
Coupling Ratio		-	1/99	3/97	5/95	10/90
Max. Insertion Loss		dB	22/0.25	17.8/0.35	14.8/0.45	11.2/0.7
WDL*1 (tap port)		dB	±0.4	±0.4	±0.3	±0.2
PDL*2 (tap port)		dB	≤0.12			
Thermal Stability (tap port)		dB/°C	≤0.002 over -40 ~ +80°C			
Directivity	1x2	dB	≥50, ≥60 on request			
	2x2	dB	≥65			
Lead Length		m	1, others on request			
Lead Type		-	250um bare fiber	900um loose tube	2 or 3mm loose tube	
Package Type		-	A1	A3 or B	B	
Operating Temperature		°C	-40 ~ +80	-20 ~ +70	-20 ~ +70	
<b>1xN, NxN</b>						
Configuration		-	N x 4 N=1,2, 4	N x 8 N=1,2, 8	N x 16 N=1,2, 16	N x 32 N=1,2, 32
Center Wavelength		nm	1310 and 1550			
Bandwidth		nm	±40			
Max. Excess Loss		dB	0.2	0.3	0.4	0.5
Typ. Insertion Loss		dB	6.2	9.3	12.4	15.5
Max. Insertion Loss		dB	7.0	10.5	14.0	17.5
Uniformity		dB	≤1.6	≤2.4	≤3.2	≤4.0
Polarization Dependent Loss		dB	≤0.12	≤0.18	≤0.24	≤0.3
Thermal Stability		dB	≤0.2	≤0.3	≤0.4	≤0.5
Directivity		dB	≥60			
Operating Temperature		°C	-20 ~ +70			
Lead Length		m	1, others on request			
Lead Type		-	900um, 2mm or 3mm loose tube			
Package Type		-	C	D	E	E

\*1 WDL = Wavelength dependent loss

\*2 PDL = Polarization dependent loss

## Dimensional Drawing

Please see coupler package information.

## Ordering Information

Part Number: **PDWC-18 3 -12.5X8SM 3 D - 1 FA**

**1 2 3 4 5 6 7**

<b>1</b>	Configuration	12=1x2, 22=2x2, 18=1x8, 1616=16x16, 132=1x32, etc.
<b>2</b>	Wavelength	3=1310nm & 1550nm
<b>3</b>	Coupling Ratio	50/50, 40/60, 20/80, 5/95, 3/97, 25x4(for 25/25/25/25), etc.
<b>4</b>	Lead Type	1=250um, 2=900um, 3=2.0mm, 4=3.0mm
<b>5</b>	Package Type	A1, A3, B, C, D or E
<b>6</b>	Lead Length	0.5=0.5m, 1=1m, etc.
<b>7</b>	Connectors Terminated	Blank=no connector, FU=FC/UPC, FA=FC/APC, SU=SC/UPC, SA=SC/APC

Products manufactured with  
ISO 9001 certified facilities



**Pacific Interconnections • [www.pacificinterco.com](http://www.pacificinterco.com) • 425-2779527**

We reserve the rights to make any changes to the product(s) or information contained herein without notice. No liability is assumed.