




MTRJ CONNECTOR

- Low insertion loss
- High return loss
- User friendly
- Compact size

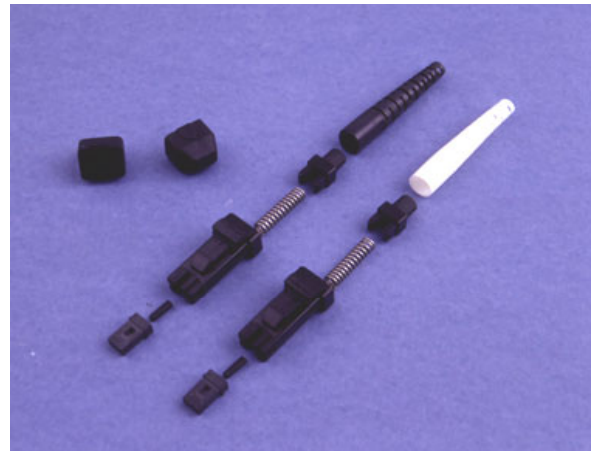

Specifications

	Singlemode	Multimode
Insertion Loss		≤ 0.5dB
Return Loss	≥ 35dB	-
Exchangeability		≤ 0.2dB
Repeatability (500 matings)		≤ 0.2dB
Cable Retention (φ3.0mm)		≥ 6kg
Operating Temperature		-20 ~ +70°C
Storage Temperature		-40 ~ +70°C

Ordering Information

Example: CON - MTRJ - MM - 1.8 - 26
1 2 3 4

- | | |
|---|--|
| 1 Connector | SC, FC, ST, MTRJ, LC, MU, etc. |
| 2 Fiber | SM = Singlemode; MM = Multimode |
| 3 Cable Diameter | 1.8 = φ1.8mm Zipcord ; 3.0 = φ3.0mm round |
| 4 Ferrule Hole Size | 25 = 125um; 25.5 = 125.5um; 26 = 126um; 27 = 127um |

* Specifications subject to change without prior notice.



PACIFIC INTERCONNECTIONS, LLC

1022 N 33RD Pl., Renton, WA 98056, USA.

Tel: (425) 277 9527 Fax: (425) 277 2599

www.pacificinterco.com