




MU CONNECTOR

- Low insertion loss
- High return loss
- Good exchangeability and repeatability
- Compact size

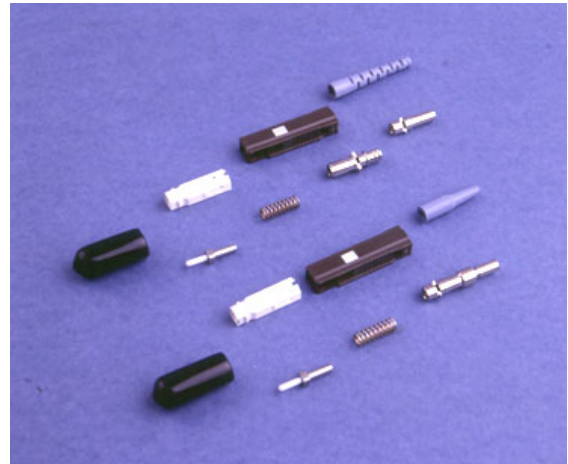

Specifications

	Singlemode		Multimode
Insertion Loss	≤ 0.3dB		
Return Loss	SPC: ≥45dB	UPC: ≥50dB	-
Exchangeability	≤ 0.2dB		
Repeatability (500 matings)	≤ 0.2dB		
Cable Retention (φ2.0mm)	≥ 5kg		
Operating Temperature	-20 ~ +70°C		
Storage Temperature	-40 ~ +70°C		

Ordering Information

Example: CON - MU / - SM - 2.0 - 25.5
1 2 3 4 5

- | | | |
|---|-------------------|--|
| 1 | Connector | SC, FC, ST, MTRJ, LC, MU, etc |
| 2 | Finish | PC, none= flat |
| 3 | Fiber | SM = Singlemode; MM = Multimode |
| 4 | Cable Diameter | 2.0 = φ2.0mm; 0.9 = φ0.9mm |
| 5 | Ferrule Hole Size | 25 = 125um; 25.5 = 125.5um; 26 = 126um; 27 = 127um |

* Specifications subject to change without prior notice.



PACIFIC INTERCONNECTIONS, LLC

1022 N 33RD Pl., Renton, WA 98056, USA.
 Tel: (425) 277 9527 Fax: (425) 277 2599
www.pacificinterco.com