




## PNEUMATIC CRIMPER

### Description

CRM-2 is mainly designed for fiber optic connector crimping to secure the connector with the optical cable. By replacing the crimp die with a press die, the machine can be used to press-fit ferrule and flange. It is featured with compact size, precise structure, safe to users and high quality. Custom made crimp dies are also available upon request.

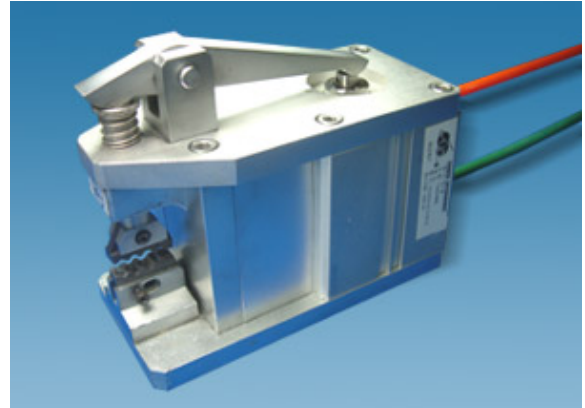

### Features

- Use pneumatic power
- Compact size and precise structure
- Large output force
- Easy replacement of dies
- Safe to users
- Step-on switch for applying force
- Air pressure adjustable
- Small cylinder implies small consumption of compressed air and energy

### Applications

- Connector crimping for all kinds of connectors, such as SC, FC, ST, MTRJ, LC MU, etc
- Press fitting for ferrule and flange
- Other crimping and press fitting application

### Specifications

Efficiency (no. of crimping per min.)	120 crimping / min
Air Pressure	0.65 ~ 0.7 Mpa
Max. Output force	378-528 kg
Air Consumption for each crimping	0.25L
Motion Length	16mm
Size	210mmX95mmX160mm

### Ordering Information

Part Number: **CRM- 2 001**

**1**

**1** Crimp Die Size      Blank      No crimp die included  
001      Consult our sales rep.

Products manufactured in  
ISO 9001 certified facilities



Pacific Interconnections • [www.pacificinterco.com](http://www.pacificinterco.com) • 425-2779527

We reserve the rights to make any changes to the product(s) or information contained herein without notice. No liability is assumed.